

KVR21R15D4K4/64I

64GB (16GB 2Rx4 2G x 72-Bit x 4 pcs.) PC4-2133
CL15 Registered w/Parity 288-Pin DIMM Kit

DESCRIPTION

ValueRAM's KVR21R15D4K4/64 is a kit of four 2G x 72-bit (16GB) DDR4-2133 CL15 SDRAM (Synchronous DRAM) registered w/ parity, 2Rx4, ECC, Intel® Compatibility Tested, memory module, based on thirty-six 1G x 4-bit FBGA components per module. Total kit capacity is 32GB. The SPD is programmed to JEDEC standard latency DDR4-2133 timing of 15-15-15 at 1.2V. Each 288-pin DIMM uses gold contact fingers. The electrical and mechanical specifications are as follows:

FEATURES

- Power Supply: VDD=1.2V (1.14V to 1.26V)
- VDDQ = 1.2V (1.14V to 1.26V)
- VPP - 2.5V (2.375V to 2.75V)
- VDDSPD=2.25V to 2.75V
- Functionality and operations comply with the DDR4 SDRAM datasheet
- 16 internal banks
- Bank Grouping is applied, and CAS to CAS latency (tCCD_L, tCCD_S) for the banks in the same or different bank group accesses are available
- Data transfer rates: PC4-2133, PC4-1866, PC4-1600
- Bi-Directional Differential Data Strobe
- 8 bit pre-fetch
- Burst Length (BL) switch on-the-fly BL8 or BC4(Burst Chop)
- Supports ECC error correction and detection
- On-Die Termination (ODT)
- Temperature sensor with integrated SPD
- This product is in compliance with the RoHS directive.
- Per DRAM Addressability is supported
- Internal Vref DQ level generation is available
- Write CRC is supported at all speed grades
- CA parity (Command/Address Parity) mode is supported


SPECIFICATIONS

| | |
|--|-------------------|
| CL(IDD) | 15 cycles |
| Row Cycle Time (tRCmin) | 47.05ns(min.) |
| Refresh to Active/Refresh Command Time 1x mode (tRFCmin) | 260ns(min.) |
| Row Active Time (tRASmin) | 33.00ns(min.) |
| Maximum Operating Power | TBD W* |
| UL Rating | 94 V - 0 |
| Operating Temperature | 0° C to +85° C |
| Storage Temperature | -55° C to +100° C |


*Power will vary depending on the SDRAM used.

Continued >>

MODULE DIMENSIONS

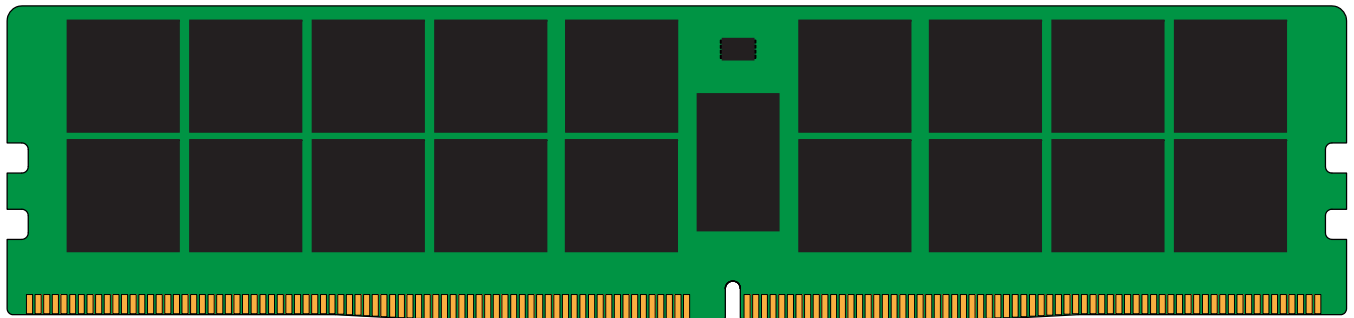

Front

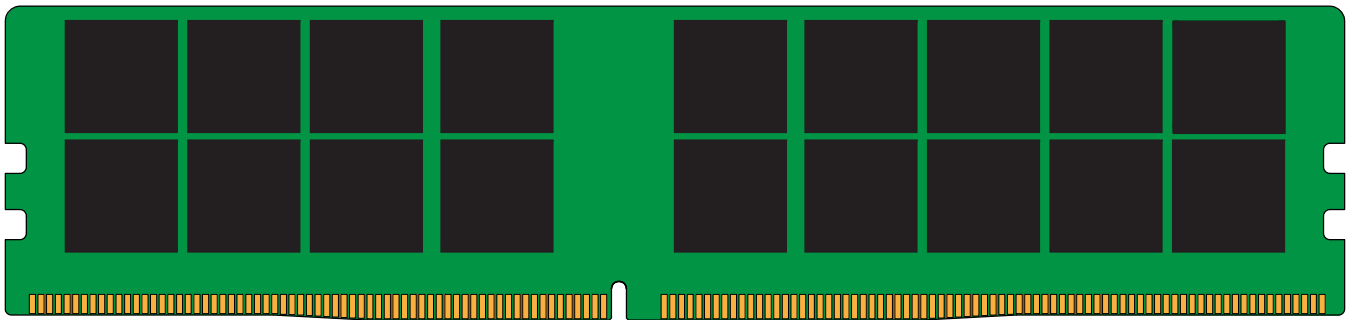

Back

